


Media Rolls

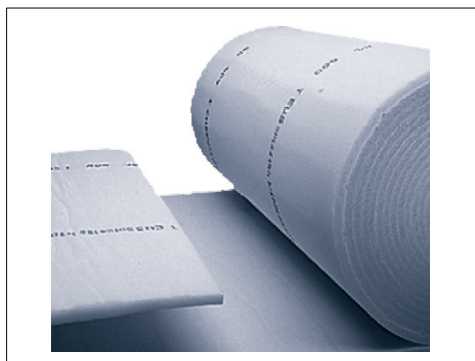

Advantages

- Available for all kind of applications

Application: For use as a pre filter in air conditioning, and spraybooth ventilation.

Media: Synthetic and glass fiber

EN779:2012 efficiency: G2-M5

Arrestance efficiency: 65% - 92%.

Temperature: 80°C - 100°C maximum in continuous service.

Humidity: 100% RH.

| Model Name | Characteristics | Width | Length | Filter class | Velocity m/s | Pressure drop | Unit volume m ³ | Dust holding g/m ² |
|--------------------------|-----------------|-------|--------|--------------|--------------|---------------|----------------------------|-------------------------------|
| Synthetic media | | | | | | | | |
| T15-150 | | 2,05 | 20 | G2 | 1.5 | 15 | 0.53 | 410 |
| T15-150 | | 1 | 20 | G2 | 1.5 | 15 | 0.26 | 410 |
| PST 290 | | 2,05 | 20 | G4 | 1.10 | 41 | 0.82 | 350 |
| PST 290 | | 1 | 20 | G4 | 1.10 | 41 | 0.40 | 350 |
| PST 290 | | 0,76 | 20 | G4 | 1.10 | 41 | 0.30 | 350 |
| T15-350 | | 2,05 | 20 | G4 | 1.5 | 25 | 0.62 | 678 |
| T15-500 | | 2,05 | 20 | G4 | 1.6 | 35 | 0.08 | 540 |
| POLY 50 | | 2,05 | 20 | G3 | 1.7 | 45 | 2.05 | 550 |
| POLY SOFT 50 | | 2 | 10 | G3 | 1.8 | 52 | 1.00 | 673 |
| POLY SOFT 50 | | 2 | 20 | G3 | 1.9 | 52 | 2.00 | 673 |
| HC - 80 | | 1 | 50 | G2 | 1.10 | 12 | 0.50 | 360 |
| Glass fiber media | | | | | | | | |
| PR 50 | | 0.710 | 20 | G2 | 1.8 | 30 | 0.71 | 600 |
| PR 50 | | 0.710 | 40 | G2 | 1.8 | 30 | 1.42 | 600 |
| PR 50 | | 1.0 | 20 | G2 | 1.8 | 30 | 1.00 | 600 |
| PR 50 | | 1.0 | 40 | G2 | 1.8 | 30 | 2.00 | 600 |
| PR 50 | | 1.5 | 20 | G2 | 1.8 | 30 | 1.5 | 600 |
| PR 50 | | 1.5 | 40 | G2 | 1.8 | 30 | 3.00 | 600 |
| PR 50 | | 1.829 | 20 | G2 | 1.8 | 30 | 1.829 | 600 |
| PR 50 | | 2.0 | 20 | G2 | 1.8 | 30 | 2.00 | 600 |
| PR 50 | | 2.0 | 30 | G2 | 1.8 | 30 | 3.00 | 600 |
| PR 75 | | 0.71 | 40 | G2 | 1.8 | 35 | 2.13 | 750 |
| PR 100 | | 0.762 | 20 | G2 | 1.8 | 40 | 1.524 | 900 |
| PR 100 | | 1.0 | 20 | G2 | 1.8 | 40 | 2.00 | 900 |
| PR 100 | | 1.0 | 40 | G2 | 1.8 | 40 | 4.00 | 900 |
| PR 100 | | 1.524 | 20 | G2 | 1.8 | 40 | 3.048 | 900 |
| PR 100 | | 1.524 | 40 | G2 | 1.8 | 40 | 6.096 | 900 |
| PR 100 | | 1.829 | 20 | G2 | 1.8 | 40 | 3.658 | 900 |
| GR50 | | 0.610 | 40 | G3 | 1.8 | 35 | 1.25 | 700 |
| VK25 White | Impregnated | 2 | 20 | G2 | 2.5 | 60 | | 700 |
| VK50 White | Impregnated | 2 | 20 | G3 | 2.5 | 70 | | 1500 |
| VK50 Green | Dry | 2 | 20 | G2 | 1 | 25 | | 1200 |
| SC600T | Impregnated | 2 | 20 | M5 | 0.25 | 48 | | 305 |

Other sizes and cut pads available on request.