



# G-Force™ II

Graco's Complete Line of Professional  
Gasoline Pressure Washers



www.graco.com

## PROFESSIONAL ADVANTAGES

- High performing **Honda® GX engines** for the toughest professional cleaning jobs: surface preparation, chemical treatment, horizontal cleaning, etc...
- Revolutionary **aircraft grade aluminium frame** with dual handles delivers a lightweight and efficient design for easy transport on and off your jobsite
- **Range diversity** suited for your application. The right unit for the right job with our Light Duty, Contractor Duty and Heavy Duty series

Professional Cleaning Applications

G-FORCE™ II 2532 DD - G-FORCE™ II 3027 DD  
G-FORCE™ II 3032 DD - G-FORCE™ II 4040 DD - G-FORCE™ II 4040 DDC  
G-FORCE™ II 4040 BD - G-FORCE™ II 4040 BDC



# G-Force™ II

Pressure Washers for Professionals:  
Extreme Reliability and Performance

The needs of your job, translated into Graco's G-Force II pressure washers. From occasional up to frequent and long lasting jobs, our Direct Driven and Belt Driven pressure washers provide it all. Choose the right unit for the right job.

## G-FORCE™ II PRESSURE WASHERS

### Direct Drive

Our compact direct driven pressure washers offer enough power and performance to tackle most cleaning and preparation jobs. Our Direct Drive range models are equipped with features that suit your occasional or average duty applications.

### Belt Drive

The belt drive pressure washers are Graco's top-of-the-line cold water units, designed to tackle the toughest heavy duty applications while reducing vibration and extending the life of your unit. Heavy duty engines and pumps combined with high pressure and flow provide the ideal solutions for heavy-duty applications.



### Powered by Honda®

- Industrial grade engines
- Low oil level shutdown




### External Unloader

- Adjusts pressure
- Protects against over heating in bypass mode
- EZ Start pressure relief



### QuikDisconnect™ Tips

Maximize your cleaning power by selecting the tip that best matches the maximum pressure and flow.



Light-Duty



Contractor-Duty



Heavy-Duty

## Materials & Applications

Designed for all, fine-tuned for you and your job ...  
Get the G-Force II that suits your job requirements.

| Type            | Advantage                                      | G-Force II                     | Application  |
|-----------------|--|--------------------------------|--|
| LIGHT-DUTY      | Light & compact with the power to perform      | 2532 DD<br>3027 DD             | Occasional cleaning jobs by Handymen, Semi-Professionals                       |
| CONTRACTOR-DUTY | High performance & features for frequent users | 3032 DD<br>4040 DD<br>4040 DDC | Periodical cleaning jobs by Professional Painters and Contractors              |
| HEAVY-DUTY      | Built to work all day, every day               | 4040 BD<br>4040 BDC            | Frequent and long lasting cleaning by Professional Painters, Large contractors |



Watch our  
**application video** at:  
<http://20.graco.eu.com>





### Chemical Injector Kit

Add chemicals for heavy duty cleaning jobs

### Aircraft Grade Aluminium Frame

- Up to 40% lighter
- Corrosion resistant to water and chemicals




## GOOD TO KNOW



### ROTATING AND OSCILLATING TIPS

Rotating and oscillating tips increase your cleaning power and decrease your cleaning time. They offer 0° spray impact with 25° coverage. Tips include a filter with quick connection and offer heavy-duty components for long life and reliability. Can be used on pavements, driveways, vehicle tracks, muddy areas, old peeling paints and concrete surfaces.

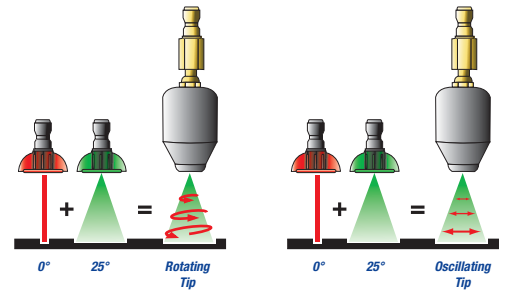

### Proven Pumps

- AR & General pumps standard across the line
- Built-in thermal sensors to prevent overheating in bypass mode

### Exclusive CAT® Pump Option

- G-Force II 4040 DDC and 4040 BDC models
- Most durable long lasting pumps

## ! TIP

### Belt Drive

Belt Driven pressure washers are ideal for heavy duty applications. The belt-pulley system provides a separate engine-pump system which reduces vibrations, rpms and operating temperatures resulting in less pump fatigue and longer lasting performance.

[www.graco.com](http://www.graco.com)

## Tip Selection Chart



|                        | 0°  | 15°  | 25°  | 40°   | CHEMICAL   |
|------------------------|---|--|--|---|--|
| <b>TIP DESCRIPTION</b> | Cutting   | Chiseling  | Flushing   | Washing   | Chemical   |
| <b>USE</b>             | Delivers a concentrated stream that can gouge or cut. | Works like a scraper when used at a 40° angle.   | Most common nozzle for general cleaning.                         | Wide spray for washing or rinsing a large area.                           | Low pressure nozzle for use with detergent injector. |
| <b>TYPICAL JOBS</b>    | Removes stains from concrete or other hard surfaces.  | Strips paint; removes grease, mildew and stains. | Cleans dirt from outer walls, pavements, outdoor furniture, etc. | Washes vehicles, windows, aluminium cladding and other delicate surfaces. | Applies detergent, mists and rinses.                 |





# G-Force™ II Accessories

Get the most out of your equipment, using our professional accessories

## Improve your cleaning quality

### Guns



- 244785 G-Force gun only (345 bar)
- 244779 G-Force gun 50 cm (345 bar)
- 127469 G-Force gun 90 cm (thread) (220 bar)
- 244784 G-Force gun 90 cm (345 bar)
- 800429 G-Force HD gun 90 cm, with HD gun handle (345 bar)

### Extensions

- 16X668 G-Force extension 180 cm
- 116564 G-Force tele-extension 180 – 550 cm
- 16X669 G-Force tele-extension 180 – 730 cm
- 16X670 G-Force belt for tele-extensions

### Hose Reels & Hoses



- 16X665 Hose reel kit, 30 m capacity, 240 bar
- 16X664 Hose reel kit, 30 m capacity, 345 bar
- 16E286 Hose 3/8" x 7.5 m Thread (240 bar)
- 127534 Hose 3/8" x 15 m Thread (240 bar)
- 244783 Hose 3/8" x 15 m Quick Disconnect (275 bar)
- 16X667 Hose 3/8" x 30 m Quick Disconnect (275 bar)

### Wet Sand Blasting Kit



- 244766 Sandblasting kit, 275 bar  
Fittings, couplers, clamps, adapters, housing sealant and hose assembly (tip not included)
- 800031 Sand saver adjustable valve
- 805313 Sand blasting nozzle (3027DD)
- 805316 Sand blasting nozzle (3032DD)
- 805321 Sand blasting nozzle (4040DD/BD/C)

### Horizontal Surface Cleaners



- 16X666 Horizontal surface cleaner, 45 cm

### Couplers & Attachments



- 16X680 Gutter cleaning attachment
- 16X679 Ball valve water shutoff
- 801009 Coupler for wand extensions, 1/4"
- 801568 QD coupler 3/8" (M) x 3/8" NPT(F) stem
- 801569 QD coupler 3/8" (F) x 3/8" NPT(F) coupler
- 16X682 G-Force parts box  
Tips, plugs, couplers, sockets, thread-seal tape and o-rings
- 287643 Gardena® water connection adapter (brass)

### Fluids

- 246377 Pump oil, 1 liter, for triplex plunger - pumps only
- 117784 Pump oil, 0.133 liter, for radial axial - pumps only

### Tips



- 198012 Rotating pressure washer tip (250 bar)
- 198014 Rotating pressure washer tip (360 bar)
- 198013 Oscillating pressure washer tip (250 bar)



| ORIFICE SIZE | 0°     | 15°    | 25°    | 40°    | SET OF 4 TIPS (0°-15°-25°-40°) |
|--------------|--------|--------|--------|--------|--------------------------------|
| 3.0          | 805535 | 805536 | 805537 | 805538 | 244768                         |
| 3.5          | 805539 | 805540 | 805541 | 805542 | 244769                         |
| 4.0          | 805543 | 805544 | 805545 | 805546 | 800708                         |
| 4.5          | 805547 | 805548 | 805549 | 805550 | 800709                         |
| 5.0          | 805551 | 805552 | 805553 | 805554 | 800710                         |
| 5.5          | 805555 | 805556 | 805557 | 805558 | 800711                         |

Also check our Electric Pressure Washer Leaflet: 341919

## Specifications



ALL UNITS SHIP WITH gun, hose, tips, pressure gauge, chemical kit and spare o-rings.

|   | G-Force II<br>2532 DD | G-Force II<br>3027 DD | G-Force II<br>3032 DD | G-Force II<br>4040 DD | G-Force II<br>4040 DDC | G-Force II<br>4040 BD | G-Force II<br>4040 BDC |
|---|-----------------------|-----------------------|-----------------------|-----------------------|------------------------|-----------------------|------------------------|
| <b>Part Numbers:</b> for EURO version (220 V) | 24U985                | 24U986                | 24U987                | 24U988                | 24U989                 | 24U990                | 24U991                 |
| Engine - all powered by Honda®                | GX200 200 cm³         | GX200 200 cm³         | GX270 270 cm³         | GX390 390 cm³         | GX390 390 cm³          | GX390 390 cm³         | GX390 390 cm³          |
| Transmission                                  | Direct                | Direct                | Direct                | Direct                | Direct                 | Belt                  | Belt                   |
| Max. Working Pressure - bar (PSI)             | 220 (3200)            | 185 (2700)            | 220 (3200)            | 275 (4000)            | 275 (4000)             | 275 (4000)            | 275 (4000)             |
| Flow - lpm (gpm)                              | 9.46 (2.5)            | 11.36 (3)             | 11.36 (3)             | 15.14 (4)             | 15.14 (4)              | 15.14 (4)             | 15.14 (4)              |
| Gun - cm (in)                                 | 90 cm                 | 90 cm + QDs           | 90 cm + QDs           | 90 cm + QDs           | 90 cm + QDs            | 90 cm + QDs           | 90 cm + QDs            |
| Water   | Cold                  | Cold                  | Cold                  | Cold                  | Cold                   | Cold                  | Cold                   |
| Pump  | AR/Brass              | GP Brass Triplex      | GP Brass Triplex      | GP Brass Triplex      | CAT® Brass Triplex     | GP Brass Triplex      | CAT® Brass Triplex     |
| Adjustable unloader                           | Integrated            | External              | External              | External              | External               | External              | External               |
| Easy Start Pressure Relief                    | X                     | ✓                     | ✓                     | ✓                     | ✓                      | ✓                     | ✓                      |
| Pressure Gauge                                | ✓                     | ✓                     | ✓                     | ✓                     | ✓                      | ✓                     | ✓                      |
| Hose  | 15 m                  | 15 m + QDs            | 15 m + QDs            | 15 m + QDs            | 15 m + QDs             | 15 m + QDs            | 15 m + QDs             |
| Tips  | 4                     | 4                     | 5                     | 5                     | 5                      | 5                     | 5                      |
| 0°- 15°- 25°- 40°                             | ✓- ✓- ✓- X            | ✓- ✓- ✓- X            | ✓- ✓- ✓- ✓            | ✓- ✓- ✓- ✓            | ✓- ✓- ✓- ✓             | ✓- ✓- ✓- ✓            | ✓- ✓- ✓- ✓             |
| Chemical Tip                                  | ✓                     | ✓                     | ✓                     | ✓                     | ✓                      | ✓                     | ✓                      |
| Weight - kg (lbs)                             | 30.4 (67)             | 37.2 (82)             | 51.2 (113)            | 58.5 (129)            | 60.3 (133)             | 72.1 (159)            | 71.6 (158)             |