
DEVILBISS ADVANCE HD

The all purpose mid-sized Conventional Spray Gun Range

DEVILBISS.

DeVilbiss spray guns have *Advanced* again with the introduction of a new conventional spray gun range suitable for all Industrial spray applications.

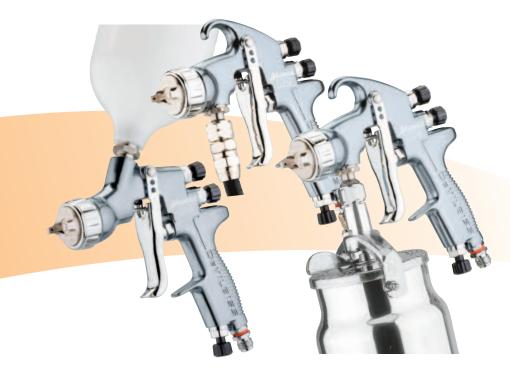

Wide range of conventional atomisation air caps provide a superior sprayed finish

Robust, Lightweight and work friendly design for *High Demand* outputs

Stainless Steel tips, needles and fluid passageways as standard

 $\label{lem:contoured} \textbf{Contoured handle design-Greatly reduces RS} \textbf{i} \ \textbf{and operator fatigue}$

CE marked and fully ATEX approved

The DeVilbiss Advance *HD* (High Demand) spray guns are available in Pressure, Suction and Gravity feed formats and a wide range of conventional technology Air Caps provide exceptional atomisation for coating wood, metal, plastic, ceramic and composite substrates with most types of solvent, waterborne, high solids and 2K materials.

DeVilbiss outperforms the rest.

Advance HD's unique high capacity airflow and outstanding atomisation characteristics are combined with a separate "balanced" air valve to provide an unrestricted flow of compressed air through the gun body, this coupled with light, feel right comfort is an unbeatable combination. Advance spray guns are ideal for small operations or high volume spraying, with the added bonus of instantly improved finishing productivity.

Advance *HD* is precision built by DeVilbiss using the best materials and component parts for a guaranteed, reliable, long and durable working life in all industrial markets.



finishingbrands.eu



DEVILBISS ADVANCE HD

The all purpose mid-sized Conventional Spray Gun Range



Advance HD's unrivalled spray performance is achieved with the utilisation of the very latest "cutting edge" atomisation technology. Advance has a wide range of high-grade Stainless Steel Fluid Tips and Needles, matched with Conventional Air Caps, manufactured from Plated Hard Brass for a long and durable working life. Select your Advance spray gun preference and nozzle combination's from the charts below to provide the Optimum performance for your individual spray process.

Suction cup pt. no. KR-566-1-B



Gravity cup pt. no. GFC-501



Gravity cup (Blue polyester) pt. no. GFC-511 for difficult fluids.

Example of Advance HD spray gun part numbering:-ADV-P430-14 means...

ADV = Advance gun / P = Pressure / 430 = Conventional Air Cap / 14 = 1.4mm Fluid tip and needle.

Advance HD spray guns kits are packaged as:- Pressure gun only, Suction gun with 1 litre cup and Gravity feed kits inc. 568 ml standard gravity cup.



Optional accessories

- 1. VSA-512 St/St Fluid Filter Kit (inc. 3 elements)
- 2. Tungsten Carbide and Hardened Tips/Needles (for use on abrasive materials)
- 3. Nylon Tipped Needle.

Air Cap Number and Type	Air Consumption Bar (psi) recommended	Air Inlet Pressure Flow ml	*Typical Fluid SIZE mm	*Typical Fan Pattern
No. 430 Conventional	339 l/min (12 scfm)	3.5 bar (50 psi)	200-280	200
No. 443 Conventional	345 l/min (12.3 scfm)	3 bar (45 psi)	200-300	300
No. 462 Conventional	380 l/min (13.5 scfm)	3 bar (45 psi)	500-3000†	450†
No. 470 Conventional	465 l/min (16.4 scfm)	3 bar (45 psi)	500-1800†	420†
No. 477 Conventional	480 l/min (17 scfm)	3 bar (45 psi)	200-800	430
No. 497 Conventional	510 l/min (18 scfm)	3.5 bar (50 psi)	200-600	380

All illustrated flow rates and fan sizes may vary according to paint/material viscosity and pressures used.

† = ceramic material

TIP AND CAP CHART

Air Cap No.	Technology	0.85 mm	1.0 mm	1.2 mm	1.3 mm	1.4* mm	1.6 mm	1.8* mm	2.0 mm	2.2* mm	2.8* mm
430	Conventional	P	P	P	PG	P	PGS	PGS	PGS	PS	
443	Conventional	P	P	P	PG	Р	PGS	PGS	PGS	PS	
462	Conventional									Pt	P†
470	Conventional									P†	P†
477	Conventional	P	P	P	P	Р	P	P	P	P	
497	Conventional	Р	Р	Р	Р	P	Р	P	Р	P	

P = Pressure G = Gravity S = Suction * Hardened & tungsten carbide tips and needles are available in these sizes.

Spray gun inlet thread sizes and type:- Air Connection 1/4" (m) Universal Thread size, accepts BSP and/or NPS connectors. Fluid Connection 3/8" (m) Universal Thread size, accepts BSP and/or NPS connectors.

For further technical information refer to the DeVilbiss Advance HD Service Bulletins.

Sales and Service through our Global Network of Industrial Distributors

Finishing Brands Locations

Americas: **USA** Brazil Mexico Europe/Asia/Africa: United Kingdom • France • Germany Australia Pacific Rim: China • Japan •

www.finishingbrands.eu

email: marketing@finishingbrands.eu











