

THE SURFACE FINISHING EQUIPMENT GROUP

SALES – SERVICE - HIRE
TRAINING – INSTALLATION

NORTH EAST BRANCH

**Hogg Blasting
& Finishing Equipment Ltd**
Washington. UK. NE37 1PR

Tel. 0191 415 3030
info@hoggblasting.com

NORTH WEST BRANCH

**Abraclean Ltd and
Jedtec Finishing Equipment**
Stockport. UK. SK5 7PP

Tel: 0161 480 8087
sales@abraclean.co.uk

- Shot Blasting Equipment
- Paint Spraying Equipment
- Powder Coating Equipment
- Fixed Extraction Booths
- Mobile Dust Extraction
- Personal Protection Equipment
- Shot Blasting Abrasives
- Spares and Consumables
- Plural Component Systems

Ercon Finishing Systems
Willenhall. UK. WV13 2JW


Tel. 01902 601 312
sales@erconfinishing.com

- Complete Finishing Plants
- Design engineers and CAD
- Industrial Ovens
- Conveyors
- Pre-treatment systems
- Electroplating Systems



Surface Finishing
Equipment Group

EDUCTOMATIC

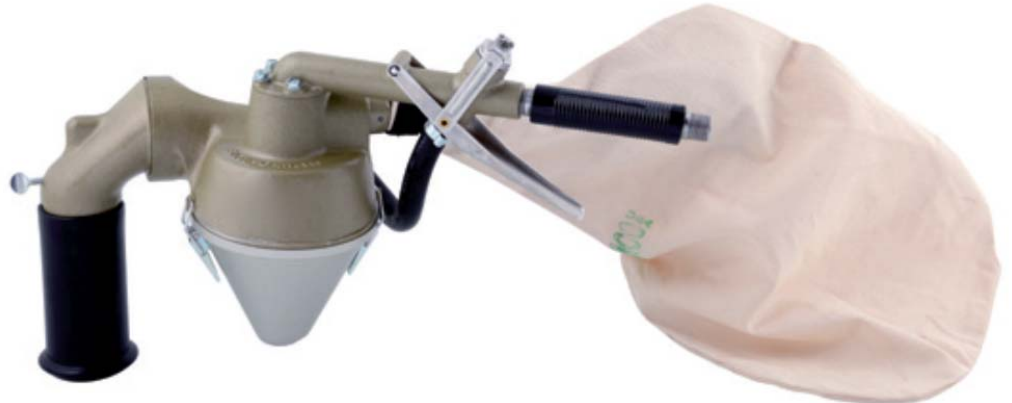

Eductomatic with Dust
Collection Bag and
Standard Head



Picture above shows optional vacuum heads

Our Spot Blasting Tools are ideal for cleaning of small areas.
The Eductomatic is our smallest closed-circuit tool, weighing around 3 kg.

Dust and abrasive are trapped by the combination of the rubber boot around the blast nozzle, a vacuum, and a cotton bag for exhausting air.

The operator controls blasting and recovery with a single trigger handle which has 2 stages for vacuum only or vacuum / blast. The hopper contains the abrasive and a venturi draws the abrasive into the airstream and propels it out the nozzle. The head swivels to allow blasting at any angle.

Optional heads can be fitted to allow a vacuum seal on corners, or edges.

SPECIFICATION:

- Media - designed for use with recyclable abrasives such as iron / steel grits.
- Blast Pattern Size - around 30 mm
- Weight - 3 kg

AIR REQUIREMENTS:

- Requires minimum of 90 cfm at 90 psi for best performance
- Air supply hose of 3/4 id required (1/2 id basic minimum)
- Air should be Filtered to prevent moisture causing abrasive blockages.

Notes :

This product only provides correct performance when used in accordance with manufacturer's instructions.