

G-Force™ II

Graco's Complete Line of Professional Gasoline Pressure Washers



PROFESSIONAL ADVANTAGES

- High performing **Honda**° **GX engines** for the toughest professional cleaning jobs: surface preparation, chemical treatment, horizontal cleaning, etc...
- Revolutionary aircraft grade aluminium frame with dual handles delivers a lightweight and efficient design for easy transport on and off your jobsite
- Range diversity suited for your application. The right unit for the right job with our Light Duty, Contractor Duty and Heavy Duty series



G-Force™ II

Pressure Washers for Professionals: Extreme Reliability and Performance

The needs of your job, translated into Graco's G-Force II pressure washers. From occasional up to frequent and long lasting jobs, our Direct Driven and Belt Driven pressure washers provide it all. Choose the right unit for the right job.

G-FORCE™ II PRESSURE WASHERS Direct Drive

Our compact direct driven pressure washers offer enough power and performance to tackle most cleaning and preparation jobs.

Our Direct Drive range models are equipped with features that suit your occasional or average duty applications.

Belt Drive

The belt drive pressure washers are Graco's top-of-the-line cold water units, designed to tackle the toughest heavy duty applications while reducing vibration and extending the life of your unit. Heavy duty engines and pumps combined with high pressure and flow provide the ideal solutions for heavy-duty applications.





Materials & Applications

Designed for all, fine-tuned for you and your job ... Get the G-Force II that suits your job requirements.

Туре	Advantage	G-Force II	Application
LIGHT-DUTY	Light & compact with the power to perform	2532 DD 3027 DD	Occasional cleaning jobs by Handymen, Semi-Professionals
CONTRACTOR-DUTY	High performance & features for frequent users	3032 DD 4040 DD 4040 DDC	Periodical cleaning jobs by Professional Painters and Contractors
HEAVY-DUTY	Built to work all day, every day	4040 BD 4040 BDC	Frequent and long lasting cleaning by Professional Painters, Large contractors





Chemical Injector KitAdd chemicals for heavy duty cleaning jobs

Aircraft Grade Aluminium Frame

- -Up to 40% lighter
- Corrosion resistant to water and chemicals




GOOD TO KNOW



ROTATING AND OSCILLATING TIPS

Rotating and oscillating tips increase your cleaning power and decrease your cleaning time. They offer 0° spray impact with 25° coverage. Tips include a filter with quick connection and offer heavy-duty components for long life and reliability. Can be used on pavements, driveways, vehicle tracks, muddy areas, old peeling paints and concrete surfaces.



! TIP

Belt Drive

Belt Driven pressure washers are ideal for heavy duty applications. The belt-pulley system provides a separate engine-pump system which reduces vibrations, rpms and operating temperatures resulting in less pump fatigue and longer lasting performance.




- AR & General pumps standard across the line
- Built-in thermal sensors to prevent overheating in bypass mode

Exclusive CAT® Pump Option

- G-Force II 4040 DDC and 4040 BDC models
- Most durable long lasting pumps

www.graco.com

Tip Selection Chart

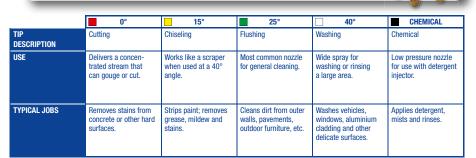





G-Force[™] **II** Accessories

Get the most out of your equipment, using our professional accessories

Improve your cleaning quality

Guns



G-Force gun only (345 bar) G-Force gun 50 cm (345 bar) 127469 G-Force gun 90 cm (thread) (220 bar)

244784 G-Force gun 90 cm (345 bar)

G-Force HD gun 90 cm, with HD gun handle 800429

(345 bar)



16X668 G-Force extension 180 cm 116564 G-Force tele-extension 180 - 550 cm

G-Force tele-extension 180 - 730 cm 16X669 G-Force belt for tele-extensions 16X670

Hose Reels & Hoses



Hose reel kit, 30 m capacity, 240 bar 16X664 Hose reel kit, 30 m capacity, 345 bar 16E286 Hose 3/8" x 7.5 m Thread (240 bar) Hose 3/8" x 15 m Thread (240 bar) 127534

244783 Hose 3/8" x 15 m Quick Disconnect (275 bar) Hose 3/8" x 30 m Quick Disconnect (275 bar) 16X667



244766 Sandblasting kit, 275 bar

Fittings, couplers, clamps, adapters, housing

sealant and hose assembly (tip not included)

800031 Sand saver adjustable valve 805313 Sand blasting nozzle (3027DD) 805316 Sand blasting nozzle (3032DD) 805321 Sand blasting nozzle (4040DD/BD/C)

Horizontal Surface Cleaners

16X666 Horizontal surface cleaner, 45 cm

Couplers & Attachments



16X680 **Gutter cleaning attachment** 16X679 Ball valve water shutoff 801009 Coupler for wand extensions, 1/4" QD coupler 3/8" (M) x 3/8" NPT(F) stem 801568 801569 QD coupler 3/8" (F) x 3/8" NPT(F) coupler

16X682 G-Force parts box

Tips, plugs, couplers, sockets, thread-seal

tape and o-rings

287643 Gardena® water connection adapter (brass)

Fluids

246377 Pump oil, 1 liter, for triplex plunger -

pumps only

117784 Pump oil, 0.133 liter, for radial axial -

pumps only





198012 Rotating pressure washer tip (250 bar) 198014 Rotating pressure washer tip (360 bar) 198013 Oscillating pressure washer tip (250 bar)



ORIFICE SIZE	0°	15°	25°	40°	SET OF 4 TIPS (0°-15°- 25°- 40°)
3.0	805535	805536	805537	805538	244768
3.5	805539	805540	805541	805542	244769
4.0	805543	805544	805545	805546	800708
4.5	805547	805548	805549	805550	800709
5.0	805551	805552	805553	805554	800710
5.5	805555	805556	805557	805558	800711

Also check our Electric Pressure Washer Leaflet: 341919

Specifications

Weight - kg (lbs)



2532 DD

GX200 200 cm³

24U985

Direct











G-Force II

4040 BD

24U990

275 (4000)

90 cm + QDs

15.14 (4)

Belt



4040 BDC

275 (4000)

90 cm + QDs

15.14 (4)

GX390 390 cm³

24U991

Belt

ALL UNITS SHIP WITH gun, hose, tips,

Max. Working Pressure - bar (PSI)	220 (3200)	185 (2700)	
Flow - Ipm (gpm)	9.46 (2.5)	11.36 (3)	
Gun – cm (in)	90 cm	90 cm + QDs	
Water	Cold	Cold	
Pump	AR/Brass	GP Brass Triplex	
Adjustable unloader	Integraded	External	
Easy Start Pressure Relief	Х	✓	
Pressure Gauge	✓	✓	
Hose	15 m	15 m + QDs	
Tips	4	4	
0°- 15°- 25°- 40°	√- √- √-X	√- √- √- X	
Chemical Tin	./	./	



Jiu	Colu	Colu	Colu	Colu	Colu		
lex	GP Brass Triplex	GP Brass Triplex	CAT® Brass Triplex	GP Brass Triplex	CAT [®] Brass Triplex		
nal	External	External	External	External	External		
1	✓	✓	✓	✓	✓		
1	✓	✓	✓	✓	✓		
Ds	15 m + QDs	15 m + QDs	15 m + QDs	15 m + QDs	15 m + QDs		
4	5	5	5	5	5		
- Х	V-V-V-V	V-V-V-V	V-V-V-V	J-J-J-J	J-J-J-J		
✓	✓	✓	✓	✓	✓		
32)	51.2 (113)	58.5 (129)	60.3 (133)	72.1 (159)	71.6 (158)		
	© 2010 Graco BVBA · Form No. 320582ENEU (rev.E) · 02/14 · Printed in Europe · Graco is certified ISO 9001.						

37.2 (8

30.4 (67)